


Uniclass	EPIC
C1/SfB	
(76.70)	Tn6

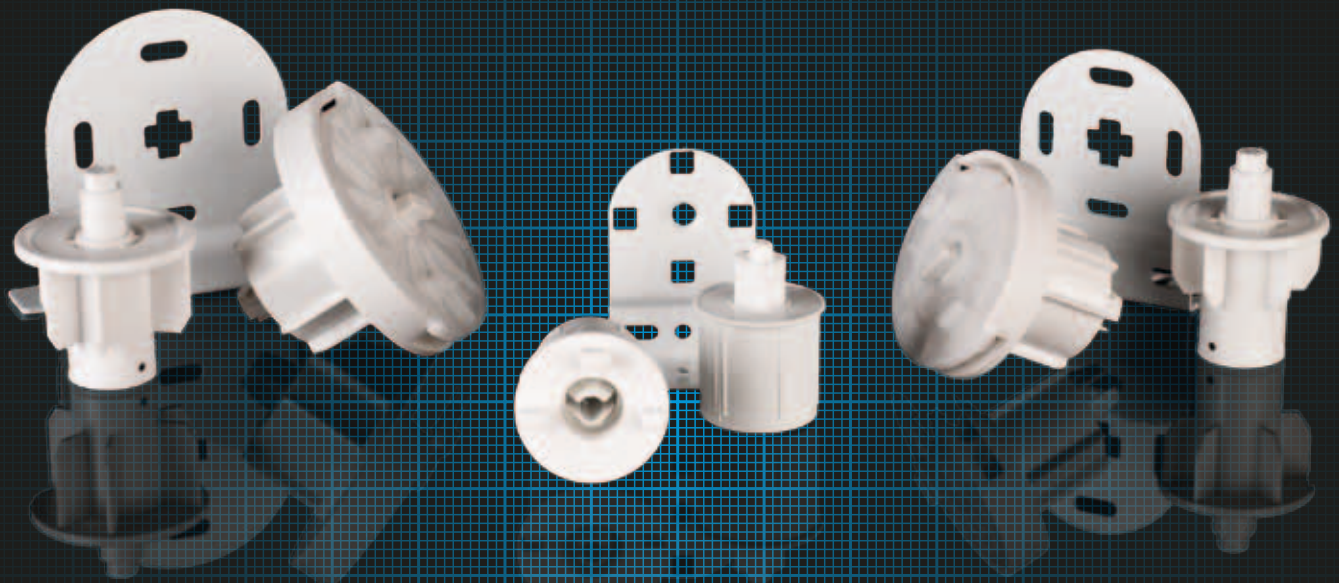

Unishade™

ROLLER SYSTEM

PRECISION ENGINEERED

PRECISION ENGINEERED

Unishade is a roller system engineered to precise perfection, offering the balance between design, engineering and quality. Technology, insight and knowledge is used to innovate, refine and push the boundaries to produce a collection of 32mm, 40mm and 45mm roller clutches.

The introduction of 3 Unishade roller systems offers outstanding performance, combined with a sophisticated design concept.

Unishade components are manufactured from the highest quality materials, high grade UV stabilised Acetal plastic is instrumental to enhanced performance and longevity.

32mm Roller System

Drive End Features:

- Tensile spring loading mechanism manufactured from stainless steel.
- Operated with plastic or nickel no.10 chain.
- Internal mechanisms are coated with tailored lubricant ensuring smooth and quiet operation.
- 3 pin secure fitting: clicks securely into universal bracket.
- Floating outer cover: enables chain to be fitted without dismantling the clutch.


Free End: Unique plunge pin offers flexibility when installing blind.

Bracket features:

- Load capacity 2.75Kg.
- Powder coated for rust resistance.
- Cover cap: quality finish to blinds fitted outside the recess.
- Extended base bracket aids installation while keeping slim profile shape
- Extension bracket available - projection dimensions 86mm

Unishade 32mm Spec.

Manufactured on aluminium tube. Acetal sidewinder control with option of plastic or nickel control chain. White powder coated universal brackets with extended base.
32mm single slot tubing. 3-pin secure fitting drive end and free end plunge pin.

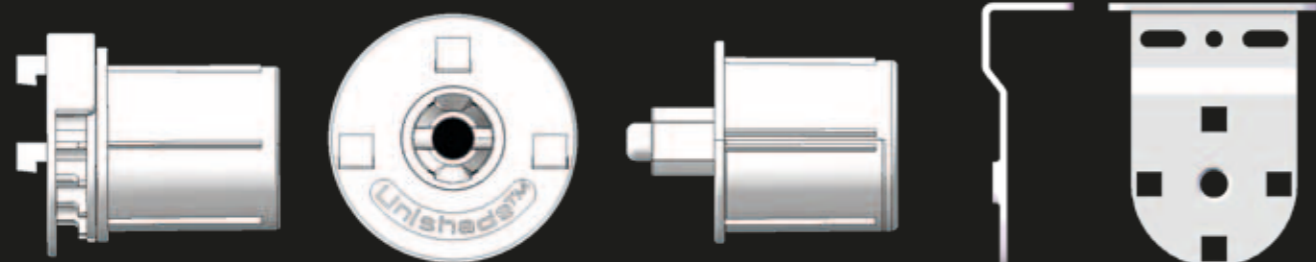

40mm Roller System

Drive End features:

- Tensile spring loading mechanism manufactured from stainless steel.
- Operated with plastic or nickel no. 10 chain.
- Internal mechanisms are coated with tailored lubricant ensuring smooth and quiet operation.
- Engineered to fit double slot tubing.


Free End: Unique plunge pin offers flexibility when installing blind.

Bracket features:

- Load capacity 3Kg.
- Powder coated for rust resistance.
- Separate brackets used for drive and free ends.
- Cover cap: quality finish to blinds fitted outside the recess.
- Dual roller bracket available enabling two roller blinds to be installed on the same bracket.

Unishade 40mm Spec.

Manufactured on aluminium tube. Acetal sidewinder control with option of plastic or nickel control chain. White powder coated brackets with extended base.
40mm double slot tubing. Single round spring drive end and free end plunge pin.

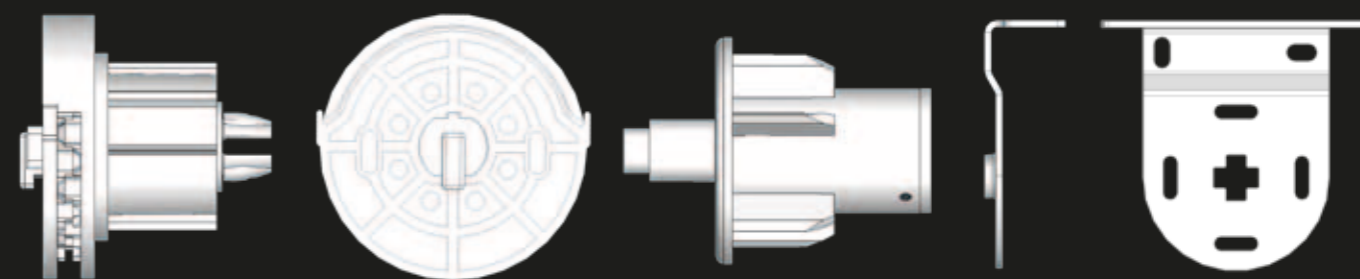

45mm Roller System

Drive end features:

- Tensile spring loading mechanism manufactured from stainless steel.
- Operated with plastic or nickel no. 10 chain.
- Internal mechanisms are coated with tailored lubricant ensuring smooth and quiet operation.
- Engineered to fit triple slot tubing.

Free End: Unique plunge pin offers flexibility when installing blind.

Bracket features:

- Load capacity 4Kg.
- Powder coated for rust resistance.
- Separate brackets used for drive and free ends.
- Cover cap: quality finish to blinds fitted outside the recess.
- Dual roller bracket available enabling two roller blinds to be installed on the same bracket.

Unishade 45mm Spec.

Manufactured on aluminium tube. Acetal sidewinder control with option of plastic or nickel control chain. White powder coated brackets with extended base.
45mm triple slot tubing. Single round spring drive end and free end plunge pin.

